



Encouraging Eco-Friendly Behaviors

The Most Flexible
High Speed Sleeve
Applicator
in the Market

1 pint to 6 Pint
Up to 600 cpm

STANDARD STRETCH SLEEVES
HIGH ELASTICITY PE SLEEVES
THIN GAUGE SHRINK SLEEVES

Continuous
Movement on a
Rotary Platform



HC Series Sleeve Applicators



Flexibility

Several models with speeds ranging
from 150 to 600 cpm

100% Allen Bradley Platform

Compact Logix,
Panelview 1000 Plus, Kinetics Servo

Modular Change-Over < 15 minutes
even on our 24 head model

Able to apply Standard and thin
gauge shrink sleeves



HC-12/24

HC Sleeve Applicators

Features	Standard
Construction	Mild Steel – Epoxy Paint CE Certified
Electrical Enclosures	
Speed	Up to 600 cpm*
Size Range	Several Models: 1 pint to 6 Pint (200ml. to 2,5 liters)
Electrical Requirements	480 VAC 3 ph 60hz.
Controls	Allen Bradley PLC, HMI, Servos



HC-12/20

Features including optionals

Construction

Sturdy Mechanical Design
Epoxy Painted Frame
(Stainless Steel Optional)
Full Enclosure
Single Unwind Reel
(Remote Reel Unwind +
Splicing table Optional)

Electrical & Control

Dual Speed Control
Safety Interlocks
Keyed Run/Jog Switch
Electrical Lock Out/Tag Out
PLC Control
Status Indicator Light Bank

Sensors & Verification

Upstream Photo Eyes
Downstream Photo Eyes
Low Material Sensor
Film Application Jam Sensor
Material Out Sensor


General

Direct Mandrel Application
Compact Design
Fits Most Existing Lines
Multiple Heads Rotary
Operation
Made in France using
Off-the-Shelf Components
Complete Documentation

System parameters for speed and size range are designed to best suit the initial project requirements.


Running outside these parameters may require parts or machine modifications

* Speeds depending on specific model and needs to be confirmed upon testing

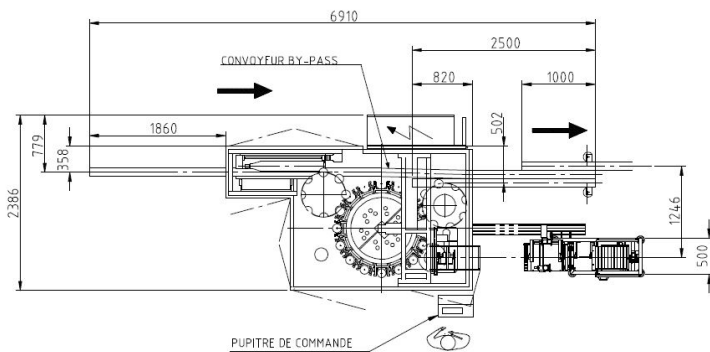

HC-12/16

Measurements are in meters – 1 meter = 3.28ft

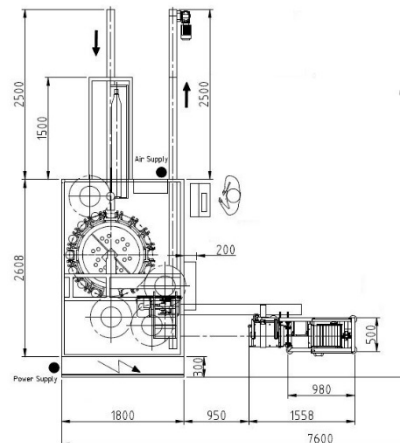

HC-12/20



CeltheQ, Inc (Canada)

1484 & 1486, rue Jean Berchmans Michaud
Drummondville, QC, J2C 7V3

Phone 514-941-8266

Email: info@celtheq.com

www.celtheq.com